

1

2

3

4


5

6


7

A


Length

P1
6±0,2

12±0,3

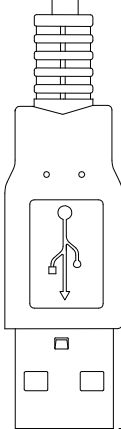

P2



B

B

C

C


PN	Length
AK67421-0.3-VM	300mm±20
AK67421-0.5-VM	500mm±20
AK67421-1-VM	1000mm±20
AK67421-2-VM	2000mm±50
AK67421-3-VM	3000mm±60
AK67421-5-VM	5000mm±80

- Material:**
- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC*2C)] +AEB(48B TC)-Jacket: Black OD: 3.5mm
 - P1 Connector: Micro USB 5P B/M Solder type
 - Shell: Nickel
 - Pin: G/F
 - Insulator color: black
 - Outer jacket: Black
 - P2 Connector: USB A Male
 - Shell: Nickel
 - Pin: G/F 3pcs type
 - Insulator color: White
 - Outer jacket: Black

D

D

PIN ASSIGNMENT


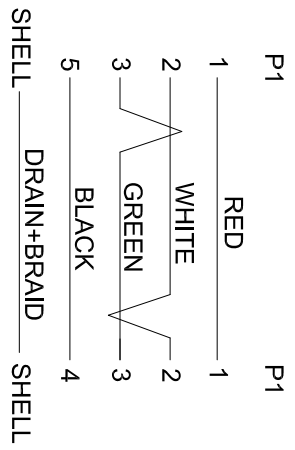


①Package

AK67421-0.3-VM

AK67421-X-VM

X=0.5, 1, 2, 3, 5



ELECTRICAL

- 100% short, open, miswire test
- Conductor Resistance: 2Ω max.
- Insulation Resistance: 5MΩ min.
- Dielectric test: DC 300V

F

F

RoHS compliant

Unit:mm

Scale Free

TOLERANCE

Unit ±0.30

DIM TOL

X° ±X°

Angle TOL

Customer-No.

Date

21.07.2017

Name

Winnie

ASSMANN WSW-No.

AK67421-X-VM

Drawing-No.

ASS 8033 CA

rev01



Replace

SHEET

1

2

3

4

5

6

7

H

G

CA80743