

**SPECIFICATIONS**

GENERAL:  
CURRENT RATING: 5A, UL AND CSA  
2.5A, VDE AND SEMKO  
NOMINAL VOLTAGE: 250V  
TEMPERATURE RANGE: -55°C TO 65°C  
DIELECTRIC STRENGTH: 2000V @ 1 MINUTE


**MATERIALS:**

HOUSING: BLACK, MOLDED THERMOPLASTIC  
UL 94V-0  
MALE PINS: COPPER ALLOY, NICKEL PLATED  
PC TERMINALS: COPPER ALLOY, TIN PLATED  
(LEAD FREE)

**NOTES:**

1. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.
2. THIS PRODUCT IS RoHS COMPLIANT.

**CUSTOMER DRAWING**

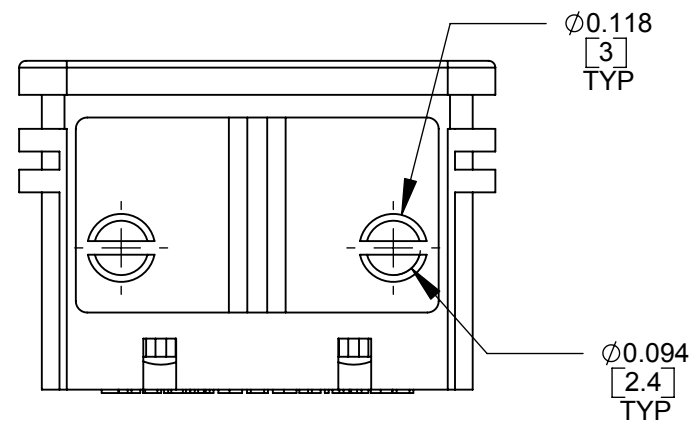

REV	ECO NUMBER	DATE	BY	APVD
A	26126	9-12-06	RF	TJK
REVISIONS				

UNLESS OTHERWISE SPECIFIED				
1. ALL DIMENSIONS IN INCHES				
- TWO PLACE DECIMALS ±0.02				
- THREE PLACE DECIMALS ±0.005				
DO NOT SCALE DRAWING				

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.									
SIZE	WIDTH	MULT	LBS/M	TEMPER					
FINISH					MATERIAL				
SPEC No.					SPEC No.				
FIRST USED ON					SCALE				
					1:0.333333				
DATE DRAWN	BY	CHKD	APVD						
9-12-06	RF	RF	TJK						
			9-12-06	9-12-06					
NAME					PART No.				
2 PIN MALE RECEPTACLE, RoHS					RAPC322X				
					SHEET 1 OF 1				
					REV A				