



Smart Technology. Delivered.

Elevated Feed Point Antennas for LMR, Cellular and GSM



ELEVATED FEED POINT ANTENNAS PROVIDE CLEAR OMNI-DIRECTIONAL SIGNALS OVER VERTICAL OBSTACLES

Laird's Elevated Feed Point mobile antennas provide optimal RF coverage, when installation requirements include light bars or other vertical impediments to optimal omni-directional coverage. These antennas are the ideal solution for public safety and limousine trunk mount applications. Models are available in UHF and 800/900 MHz frequencies, in black or chrome finish.


FEATURES

- True Field Diversity design ensures uninterrupted transmissions in urban canyons and rural drop off areas
- Phantom® outperforms a 3dB whip in many applications
- U.S. Patent Nos. 5,977,931 – 6,292,156 and 7,209,096


MARKETS

- Public safety
- Transportation
- Utility
- Military mobile
- Fixed radio applications

TYPICAL 3dBi ANTENNA PATTERNS

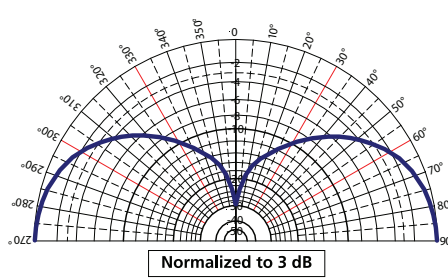

Elevation Pattern (Y, Z, or H-plane)

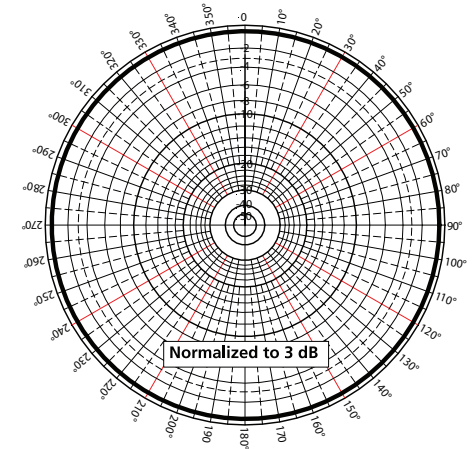

Azimuth Pattern (X,Y, or E-plane)

Americas: +1.847 839.6907
 IAS-AmericasEastSales@lairdtech.com
 Europe: +44.1628.858941
 IAS-EUSales@lairdtech.com
 Asia: +86.21.5855.0827.127
 IAS-AsiaSales@lairdtech.com
 www.lairdtech.com



Smart Technology. Delivered.

Elevated Feed Point Antennas for LMR, Cellular and GSM

SPECIFICATIONS

ELECTRICAL	
VSWR	2:1
Nominal Gain	3 dB
Maximum Power	200 W
Nominal Impedance	50 Ω
Polarization	Vertical
Pattern	Omnidirectional
Half-Power Beamwidth (Elevation° x Azimuth°)	70° x 360°
Coaxial Cable Length & Type	None
Terminations	NMO

MECHANICAL

Color	Chrome or Black
Height	See Form Factor
Diameter	1.44"
Weight	< 0.5 lb
Material	ABS
Mounting Information	NMO or Permanent Mountable
Noise Suppressor (Optional)	BlackHawk NS1535 1-35 VOLT, 15 Amp Noise Suppressor (Sold Separately)

MODEL AND ORDERING INFORMATION

MODEL	DESCRIPTION	GAIN
E(B)4500	450-512 MHz, Elevated Feed	Unity
E(B)4503C	450-470 MHz, Closed Coil, Elevated Feed	3 dBi
E(B)7603	760-870 MHz, Open Coil, Elevated Feed	3 dBi
E(B)7603C	760-870 MHz, Closed Coil, Elevated Feed	3 dBi
E(B)8063	806-896 MHz, Open Coil, Elevated Feed	3 dBi
E(B)8063C	806-896 MHz, Closed Coil, Elevated Feed	3 dBi
E(B)8065C	806-896 MHz, Closed Coil, Elevated Feed	5 dBi
E(B)8965C	896-970 MHz, Closed Coil, Elevated Feed	5 dBi

Other frequencies are
available (B) = Black

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-ELEVATED FEED 0115

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.