

MODEL:

PDU3VSR6G60A

3-Phase Switched Rackmount PDU



208V
3-Phase Input



60A Blue IEC
309 3P+E Plug



208V Single-
Phase Output



18 Outlets



16.2kW Load
Capacity



Multimode
Load Meter



Network
Interface




0U
Rackmount




Toolless
Mounting
Buttons







- A** Multimode Load Meter
- B** C13 and C19 Outlets with Multi-Function LEDs
- C** 20A 2-Pole Hydraulic Magnetic Circuit Breakers
- D** C13 and C19 Plug Inserts
- E** Removable Mounting Brackets
- F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- G** 6 ft. Input Power Cord
- H** 60A Blue IEC 309 3P+E Input Plug (IP44)
- I** Durable Metal Case
- J** Network Interface
- K** RJ45 Ethernet Jack
- L** Manual Configuration Port
- M** Environmental Monitoring Port
- N** Network Interface Reset Button



AC Input Connection: Insert 60A Blue IEC 309 3P+E plug into compatible utility, generator or UPS outlet.

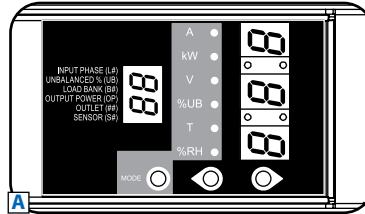

Multimode Load Meter: Display the load for any phase, bank or outlet, display temperature or humidity*, display the IP address or rotate the display 180°.

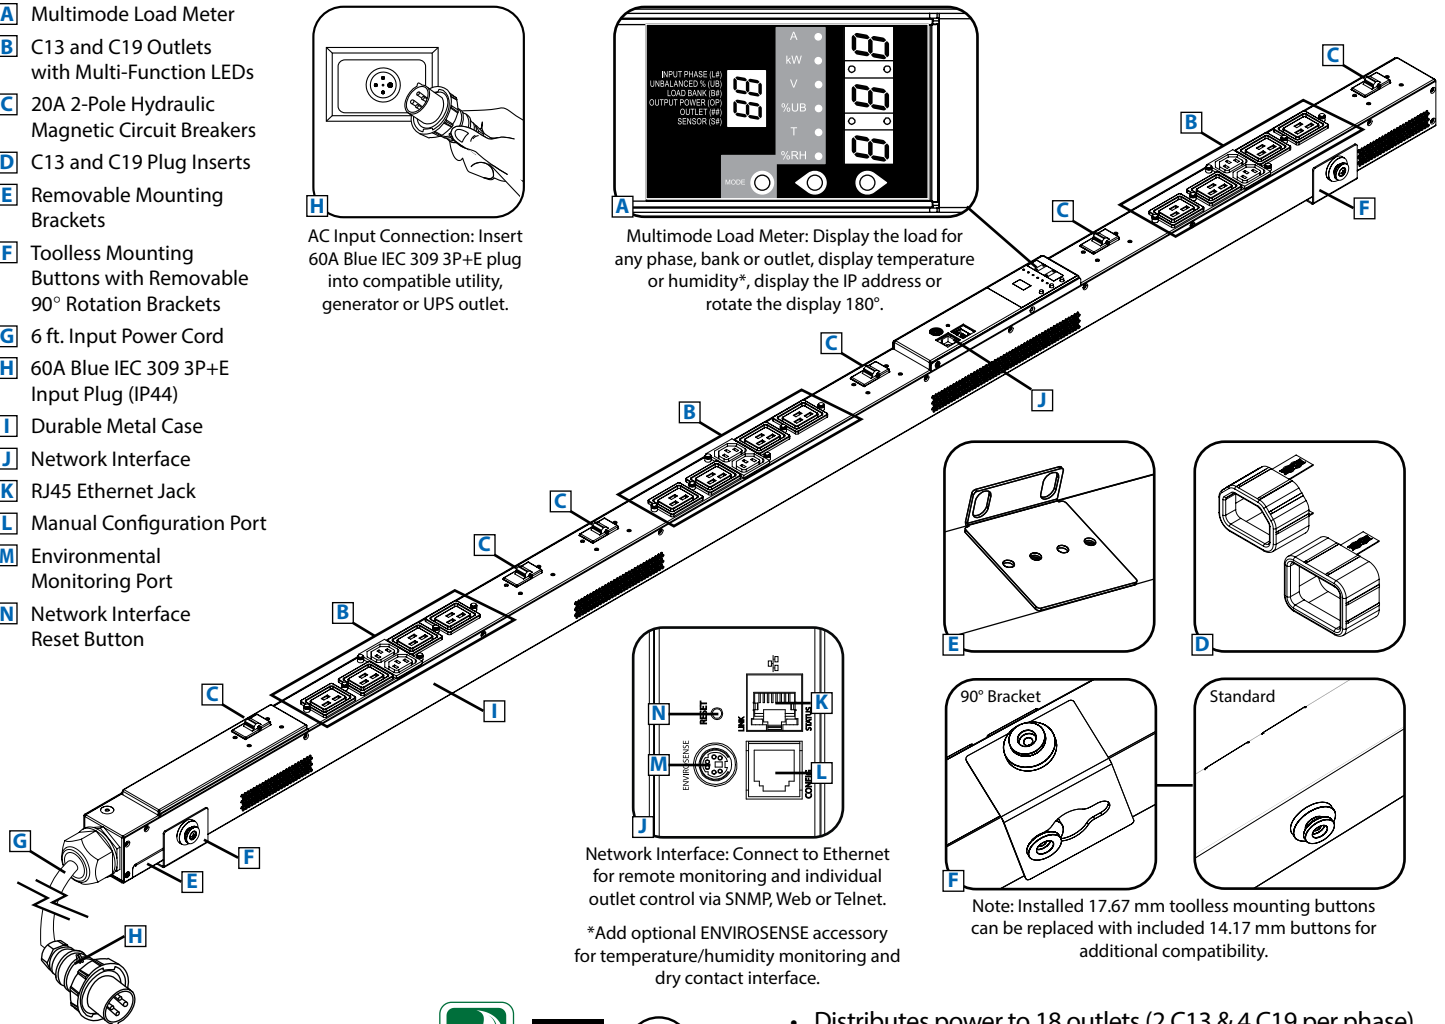

Network Interface: Connect to Ethernet for remote monitoring and individual outlet control via SNMP, Web or Telnet.

*Add optional ENVIROSENSE accessory for temperature/humidity monitoring and dry contact interface.

Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

Specifications

Model	PDU3VSR6G60A
Voltage	208V (3-Phase Input/Single-Phase Output)
Frequency	60Hz
Load Capacity	16.2kW
Input Plug	60A Blue IEC 309 3P+E (IP44 Protection Rating – Splash-Proof)
Input Cord Length	6 ft.
Outlets	18 (6 C13 / 12 C19)
Primary Mounting Option	0U (Vertical) Rackmount
Unit Weight & Dimensions	20.7 lbs / 70 x 2.17 x 2.49 (HxWxD in inches) <i>See next page for detailed unit measurements.</i>
Certifications	Tested to UL 60950-1 (US & Canada), NOM (Mexico), FCC Class A, IP44 Protection Rating (Plug)

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.









- Distributes power to 18 outlets (2 C13 & 4 C19 per phase)
- Remote monitoring and control via SNMP, Web or Telnet
- Displays load for *each bank, phase, and outlet* in real time
- Perfect for rackmount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

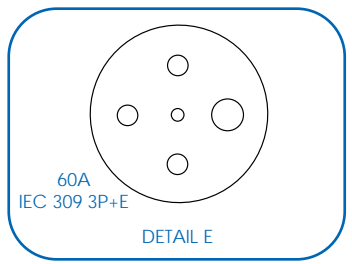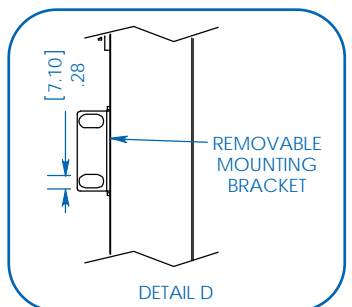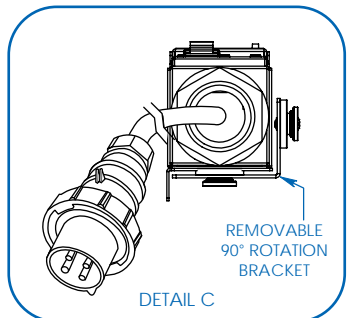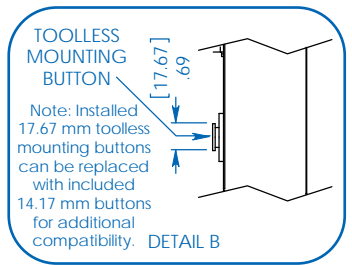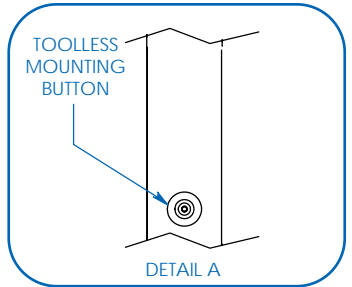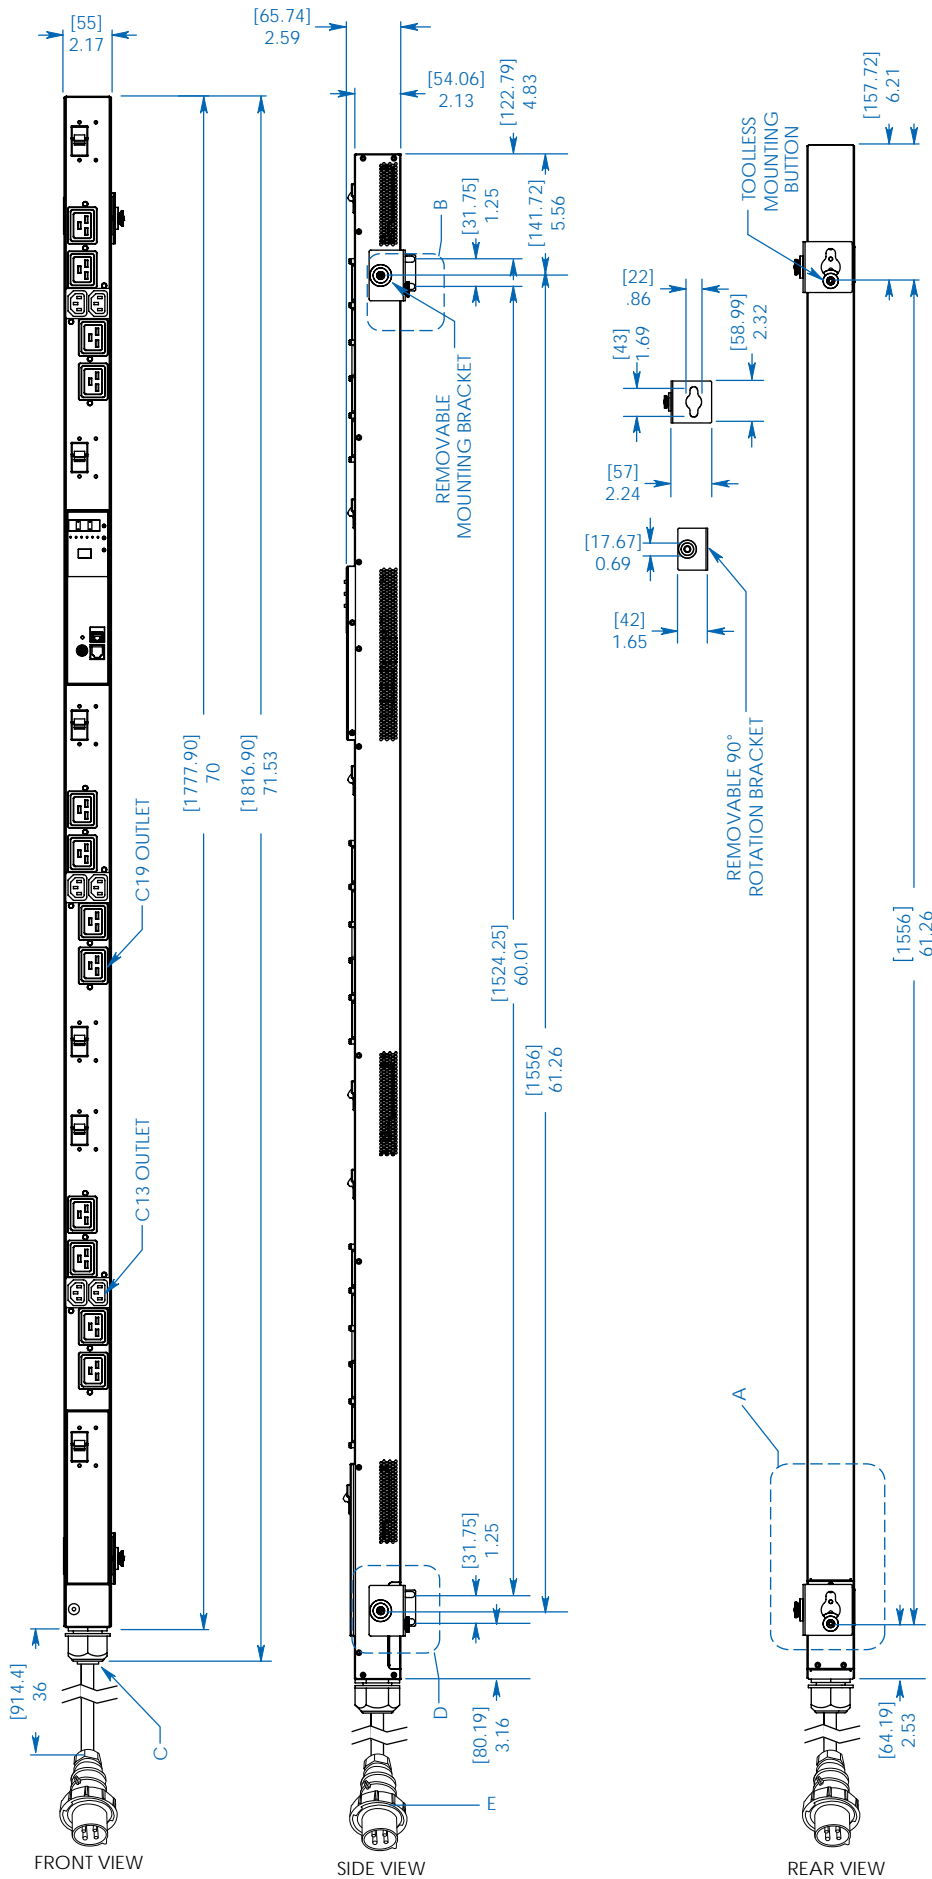

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
PDU3VSR6G60A



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234

www.tripplite.com