

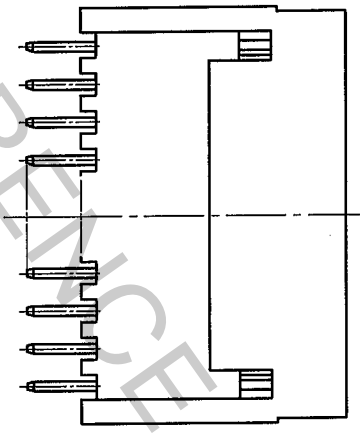
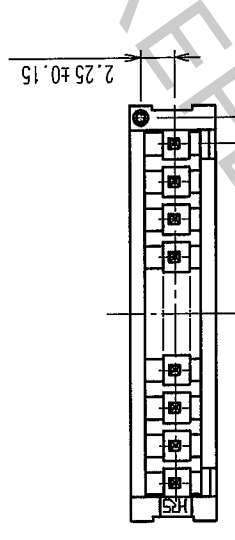
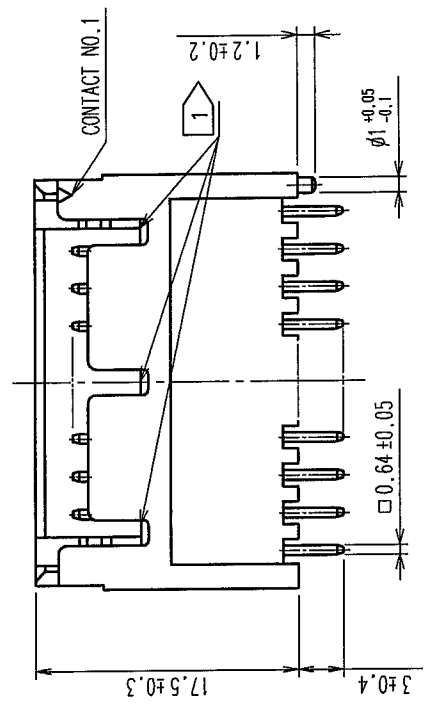
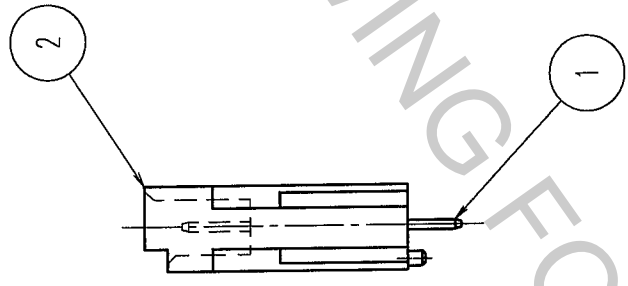


| COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE |
|-------|--------------------------|----|------|------|-------|--------------------------|----|------|------|
| △     |                          |    |      |      | △     |                          |    |      |      |
| △     |                          |    |      |      | △     |                          |    |      |      |
| △     |                          |    |      |      | △     |                          |    |      |      |

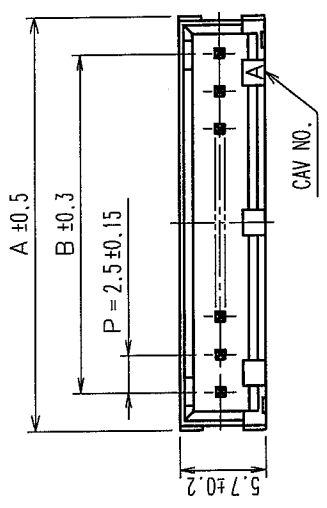

RECOMMENDED PATTERN(5:1)

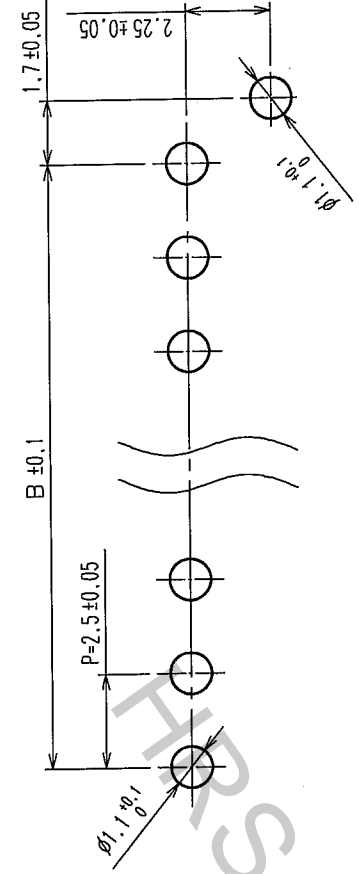

| NUMBER OF CONTACT | PART NO.             | CODE NO.        | A    | B    |
|-------------------|----------------------|-----------------|------|------|
| 2                 | DF1BD-2P-2.5DSA(05)  | CL541-0800-3-05 | 7.5  | 2.5  |
| 3                 | DF1BD-3P-2.5DSA(05)  | CL541-0801-6-05 | 10.0 | 5.0  |
| 4                 | DF1BD-4P-2.5DSA(05)  | CL541-0802-9-05 | 12.5 | 7.5  |
| 5                 | DF1BD-5P-2.5DSA(05)  | CL541-0803-1-05 | 15.0 | 10.0 |
| 6                 | DF1BD-6P-2.5DSA(05)  | CL541-0804-4-05 | 17.5 | 12.5 |
| 7                 | DF1BD-7P-2.5DSA(05)  | CL541-0805-7-05 | 20.0 | 15.0 |
| 8                 | DF1BD-8P-2.5DSA(05)  | CL541-0806-0-05 | 22.5 | 17.5 |
| 9                 | DF1BD-9P-2.5DSA(05)  | CL541-0807-2-05 | 25.0 | 20.0 |
| 10                | DF1BD-10P-2.5DSA(05) | CL541-0808-5-05 | 27.5 | 22.5 |

NOTES 1: 2 POSITIONS AND 3 POSITIONS HEADERS HAVE 1 POLARIZING SLOT AT CENTER.  
 TO 6 POSITIONS FROM 4 POSITIONS HAVE 2 POLARIZING SLOTS.  
 OTHER POSITIONS HAVE 3 POLARIZING SLOTS AS PER DRAWING.

|                               |             |   |                         |                     |                          |
|-------------------------------|-------------|---|-------------------------|---------------------|--------------------------|
| 1                             | BRASS       | SURFACE: TIN PLATED 1μm min<br>UNDER PLATING: NICKEL PLATED 0.5μm min | 2                       | POLYAMIDE           | UL94V-0, NATURAL (WHITE) |
| NO.                           | MATERIAL    | FINISH, REMARKS   | NO.                     | MATERIAL            | FINISH, REMARKS          |
| CODE NO. (OLD)                |             | DRAWN   | DESIGNED                | CHECKED             | APPROVED                 |
|                               |             | F. Matsuki<br>'04.03.26   | H. Imahara<br>'04.03.26 | J. Owa<br>'04.03.29 |                          |
| DRAWING NO.<br>EDC3-071913-01 |             | PART NO.<br>DF1BD-*P-2.5DSA(05)                                       |                         | RELEASED            |                          |
| SCALE<br>2 : 1                | UNITS<br>mm | CODE NO.<br>CL541-  |                         | 1/1                 |                          |
| HRS HIROSE ELECTRIC CO., LTD  |             |   |                         |                     |                          |

|    |  |  |  |
|----|--|--|--|
| TO |  |  |  |
|----|--|--|--|