

N-76U

Electrical Specifications (@25°C)

1. Maximum Power: 100 VA
2. Input Voltage: 115V@50/60Hz
3. Output Voltage: 115V4. Full Secondary Load: 0.86Amps RMS
5. Voltage Regulation: 9% TYP @ full load to no load

Description:

The N-76U is power transformer for isolating equipment from direct connection to the power line. This prevents electrical connection under normal or overload conditions between the primary and secondary windings.

Safety:

These units are designed with 1500V isolation between winding to winding and between winding and core. Materials and construction are rated for Class B (130°C) insulation system.

Dimensions: Unit: In inches


A	B	C	D	E
3.437	2.812	3.00	2.25	2.50

Weight: 4.0 Lbs.

Mounting Holes: 0.203 x 0.375"

Connections: 7.0±1" leads, 0.250±0.062" Skin & Tin

Schematic:

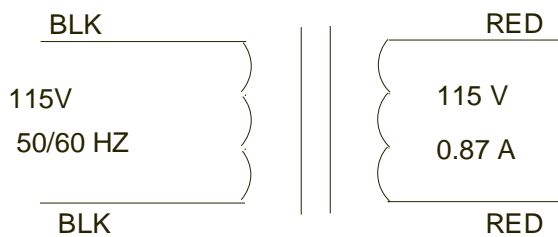

INPUT: BLK to BLK

OUTPUT: RED to RED

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

