

LED Module

LT-Q282A

LT-Q562A

LT-QB22A



Features & Benefits

- Superior Efficacy, over 200 lm/W @ LED module
- Three length options of 4 / 2 / 1-ft to well-fit in the various luminaire design
- Backward compatibility on mechanical design with H/M/V-series, easy-to-replace

Applications

- Replacement of T5/T8 tubes
- Office / Retail / Living space
- Troffer / Linear / Pendant

Table of Contents

1.	Product Code Information	-----	3
2.	Characteristics	-----	4
3.	Structure and Assembly	-----	8
4.	Certification and Declaration	-----	10
5.	Label Structure	-----	11
6.	Packing Structure	-----	13
7.	Precautions in Handling & Use	-----	14
APPENDIX			
1.	Applicable Solid Wires	-----	15

1. Product Code Information

a) LT-Q282A

Nominal CCT (K)	Product Code
3000	SI-B8V051280US
3500	SI-B8U051280US
4000	SI-B8T051280US
5000	SI-B8R051280US

b) LT-Q562A

Nominal CCT (K)	Product Code
3000	SI-B8V101560US
3500	SI-B8U101560US
4000	SI-B8T101560US
5000	SI-B8R101560US

b) LT-QB22A

Nominal CCT (K)	Product Code
3000	SI-B8V201B20US
3500	SI-B8U201B20US
4000	SI-B8T201B20US
5000	SI-B8R201B20US

2. Characteristics (If=450mA, t_p=40 °C)

a) Basic Information

Item	Rating	Unit	Remark
Rated Lifetime	>50,000	hour	L70B50
Ingress Protection (IP)	no rating	-	
Ambient / Operating Temperature (t _{amb})	-20 ~ +50	°C	
Storage Temperature	-30 ~ +80	°C	

b) Electro-Optical Characteristics

- LT-Q282A

Item	Nom. CCT (K)	Rating			If(mA)	Remark
		Min	Typ.	Max		
Luminous Flux (Φ _v)	3000	830	920	1020	lm	I _f = 450 mA t _p = 40 °C
	3500	880	975	1085		
	4000	900	1000	1110		
	5000	900	1000	1110		
Luminous Efficacy	3000	168	187	208	lm/W	I _f = 450 mA t _p = 40 °C
	3500	178	198	220		
	4000	183	203	225		
	5000	183	203	225		
CCT	3000	-	3000	-	K	-
	3500	-	3500	-		
	4000	-	4000	-		
	5000	-	5000	-		
Color Rendering Index (Ra)		80	-	-	-	
Operating Current (I _f)		-	450	-	mA	
Operating Voltage (V _i)		10.5	11.0	11.6	Vdc	I _f = 450 mA t _p = 40 °C
Power Consumption		4.7	5.0	5.2	W	I _f = 450 mA t _p = 40 °C

Notes:

- 1) t_p : temperature at which performance is specified; measured at "Tc point".
- 2) Samsung maintains a measurement tolerance of : Luminous flux: ±7 %, CRI: ±3.0, Voltage: ±0.3 V, Power Consumption: ±0.3W
- 3) Measurement tolerance of the color coordinates is ± 0.005
- 4) CCT Specification can be changed.

- LT-Q562A

Item	Nom. CCT (K)	Rating			If(mA)	Remark
		Min	Typ.	Max		
Luminous Flux (Φ_v)	3000	1655	1840	2045	lm	
	3500	1755	1950	2165		
	4000	1800	2000	2220		
	5000	1800	2000	2220		
Luminous Efficacy	3000	168	187	208	lm/W	$I_f = 450 \text{ mA}$ $t_p = 40 \text{ }^\circ\text{C}$
	3500	178	198	220		
	4000	183	203	225		
	5000	183	203	225		
CCT	3000	-	3000	-	K	-
	3500	-	3500	-		
	4000	-	4000	-		
	5000	-	5000	-		
Color Rendering Index (Ra)		80	-	-	-	
Operating Current (I_f)		-	450	-	mA	
Operating Voltage (V_f)		20.8	21.9	23.1	Vdc	$I_f = 450 \text{ mA}$ $t_p = 40 \text{ }^\circ\text{C}$
Power Consumption		9.4	9.9	10.4	W	

Notes:

- 1) t_p : temperature at which performance is specified; measured at "Tc point".
- 2) Samsung maintains a measurement tolerance of : Luminous flux: $\pm 7 \%$, CRI: ± 3.0 , Voltage: $\pm 0.3 \text{ V}$, Power Consumption: $\pm 0.3 \text{ W}$
- 3) Measurement tolerance of the color coordinates is ± 0.005
- 4) CCT Specification can be changed.

- LT-QB22A

Item	Nom. CCT (K)	Rating			If(mA)	Remark
		Min	Typ.	Max		
Luminous Flux (Φ_v)	3000	3310	3680	4090	lm	
	3500	3510	3900	4335		
	4000	3600	4000	4445		
	5000	3600	4000	4445		
Luminous Efficacy	3000	168	187	208	lm/W	$I_f = 450 \text{ mA}$ $t_p = 40 \text{ }^\circ\text{C}$
	3500	178	198	220		
	4000	183	203	226		
	5000	183	203	226		
CCT	3000	-	3000	-	K	-
	3500	-	3500	-		
	4000	-	4000	-		
	5000	-	5000	-		
Color Rendering Index (Ra)		80	-	-	-	
Operating Current (I_f)		-	450	-	mA	
Operating Voltage (V_f)		41.6	43.8	46.1	Vdc	$I_f = 450 \text{ mA}$ $t_p = 40 \text{ }^\circ\text{C}$
Power Consumption		18.7	19.7	20.7	W	

Notes:

- 1) t_p : temperature at which performance is specified; measured at "Tc point".
- 2) Samsung maintains a measurement tolerance of : Luminous flux: $\pm 7 \%$, CRI: ± 3.0 , Voltage: $\pm 0.3 \text{ V}$, Power Consumption: $\pm 0.3 \text{ W}$
- 3) Measurement tolerance of the color coordinates is ± 0.005
- 4) CCT Specification can be changed.

c) Temperature Characteristics

Item	Nominal(t_p)*	Life**	Max(t_c)***	Unit
Temperature	40	80	90	°C

Notes:

- * Temperature used to specify performance of the module (t_p).
 - ** Rated maximum performance temperature at which lifetime is specified.
 - *** Rated maximum temperature, highest permissible temperature to avoid safety risk (t_c).
- All temperatures are measured at the designated "Tc point" as indicated on the module. (See page 7)

d) Thermal Measurement


Performance temperatures are measured on "Tc point" as indicated on the module.



3. Structure and Assembly


a) Appearance & Dimension

- LT-Q282A

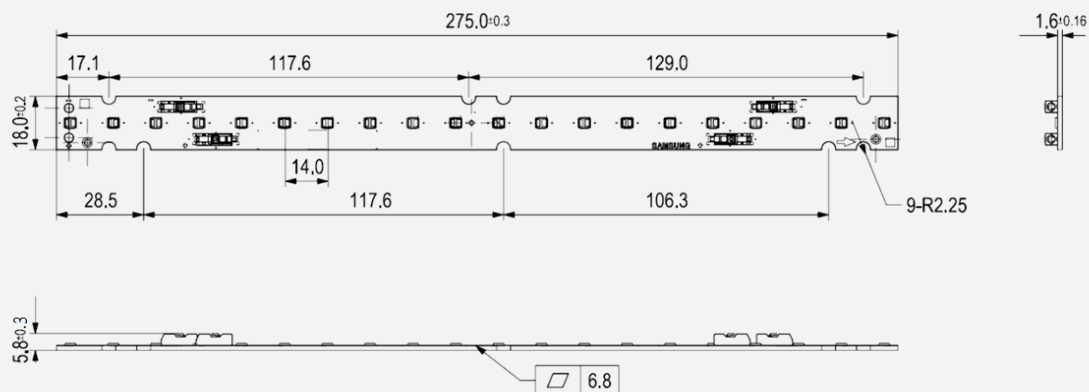


Dimension	Specification	Tolerance	Unit
Module Length	275.0	±0.3	mm
Module Width	18.0	±0.2	mm
Module Height	5.8	±0.3	mm
PCB Thickness	1.6	±0.16	mm
Module Weight	13.6	±0.68	g

- LT-Q562A

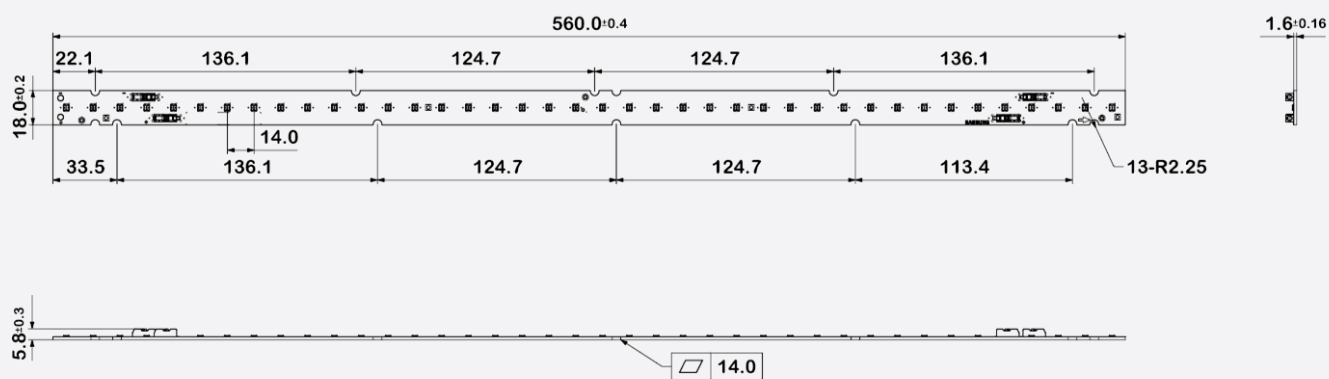

Dimension	Specification	Tolerance	Unit
Module Length	560.0	±0.4	mm
Module Width	18.0	±0.2	mm
Module Height	5.8	±0.3	mm
PCB Thickness	1.6	±0.16	mm
Module Weight	27.2	±1.36	g

- LT-QB22A

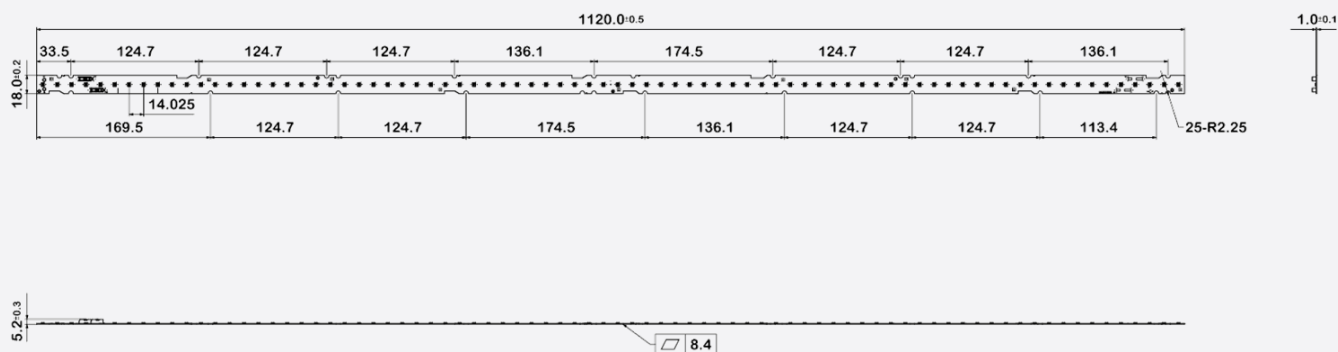

Dimension	Specification	Tolerance	Unit
Module Length	1120.0	±0.5	mm
Module Width	18.0	±0.2	mm
Module Height	5.2	±0.3	mm
PCB Thickness	1.0	±0.1	mm
Module Weight	T.B.D		g

b) Structure

Item	Specification
LED	LM301B Middle Power LED
PCB	Material : copper, solder mask, epoxy
Connector	Reworkable poke-in connector type
Wire	24~18 AWG ; terminal strip length of 7.5~8.5 mm (Appendix 1)

c) Schematic Circuit


- LT-Q282A : 4S x 5P
- LT-Q562A : 8S x 5P
- LT-QB22A : 16S x 5P

4. Certification and Declaration

Item	Compliant to	Remark
Declaration	RoHS	Hazardous Substance & Material
	REACH	Hazardous Substance & Material

5. Label Structure

a) Module Label

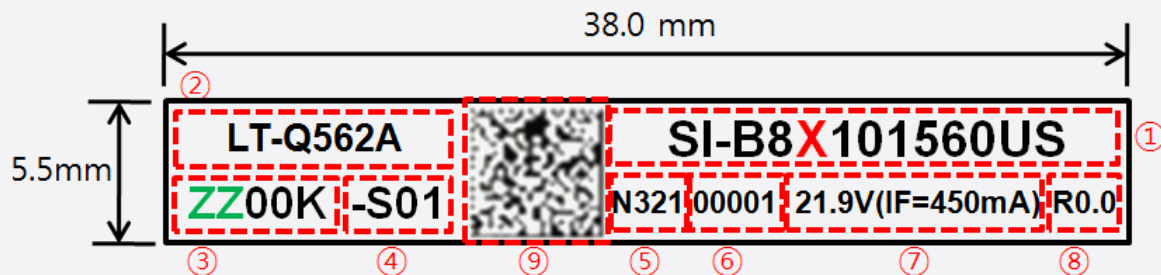

Number	Item	Remark
①	Model code	Refer to page 3 X = V, U, T, R
②	Product name	Refer to page 3
③	Color temperature	ZZ = 30, 35, 40, 50
④	LED maker & Bin rank	-S (Samsung) 00-ZZ
⑤	SMT date	N321 (2013-March-21th)
⑥	Serial No.	00001~99999; Setting "00001" every working day
⑦	Voltage (IF).	
⑧	Product Revision	
⑨	QR Code	SI-B8X101560US_N321100001ZZ00K-S01



b) TRAY & MBB bag LABEL



Number	Item	Remark
①	Model Code	Refer to page 3
②	LOT ID	
③	Quantity	Refer to page 13
④	Date of production	
⑤	Date of Issue	

C) Box Label



Number	Item	Remark
①	Model Code	Refer to page 3
②	LOT ID	
③	Place of origin	
④	Quantity	Refer to page 13
⑤	Describe production week	
⑥	Date of Issue	

6. Packing Structure

Product	Packing	Quantity (modules)	Dimension (mm)		
			Length	Width	Height
LT-Q282A	Tray				
	Outer Box				
	Pallet				
LT-Q562A	Tray				
	Outer Box		T.B.D.		
	Pallet				
LT-QB22A	Tray				
	Outer Box				
	Pallet				

7. Precautions in Handling & Use

A. The LED Lighting Modules for white light are devices which are materialized by combining white LEDs.

The color of white light can differ a little unusually to diffuser plate(sign-board panel).

Also when the LEDs are illuminating, operating current should be decided after considering the ambient maximum temperature.

B. Handling

To prevent the LED Lighting Modules from making any defectives, please handle the LED Lighting Modules with care as follows.

- (1) Don't drop the unit and don't give the unit any shocks.
- (2) Don't bend the PCB and don't touch the LED Resin.
- (3) Don't storage the Module in a dusty place or room.
- (4) Don't take the product apart.
- (5) Don't touch the LED and also PCB and other circuit parts of Module with your naked fingers or sharpness things.
- (6) Take care so that do not pull wire with hand in case of carries or moves LED Lighting Modules.

C. Cleaning

The LED Lighting Modules should not be used in any type of fluid such as water, oil, organic solvent, etc.

It is recommended that IPA (Isopropyl Alcohol) be used as a solvent for cleaning the LED Lighting Modules.

When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not. Freon solvents should not be used to clean the LEDs because of worldwide regulations. Do not clean the LED Lighting Modules by the ultrasonic.

Before cleaning, a pre-test should be done to confirm whether any damage to the LED Lighting Modules will occur.

D. Static Electricity

Static electricity or surge voltage damages the LED Lighting Modules. Please keep the working process anti-static electricity condition to prevent the Lighting from destroying, as following.

- (1) Anyone who handles the unit should be well grounded.(earth ring or anti-static glove)
- (2) Anyone who handles the unit should wear anti-electrostatic working clothes.
- (3) All kinds of device and instruments, such as working table, measuring instruments and assembly jigs in your production lines should be well grounded.

E. Storage

The LED Lighting Modules must be stored to insert a package of a moisture absorbent material(silica gel) in a box.

F. Others

If over voltage which exceeds the absolute maximum rating is applied to LED Lighting Modules.

It will cause damage Circuits(that LED is included) and result in destruction.

Do not directly look into lighted LED with naked eyes.

Please use this product within 5 months, which is kept in its original packaging unopened when stocked

Please be careful when taking a product out from packaging.

Appendix


1. Applicable Solid Wires

a) Applicable solid wires only



Wire Range AWG NO.	Number of Conductors / Diameter of a conductors (NO. / mm)	Insulation Diameter (mm)	Conductor Type
24	1 / 0.51	1.35	Solid
22	1 / 0.64	1.48	
20	1 / 0.81	1.65	
18	1 / 1.02	1.86	

※ outside insulation diameter $\Phi 2.1\text{mm}$ Max.

b) Wire strip length

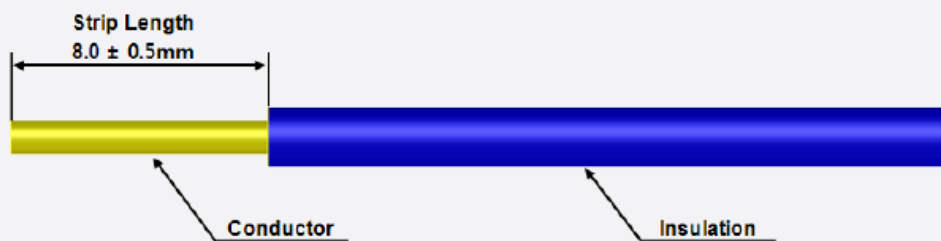

[Conductor : Bear Copper]

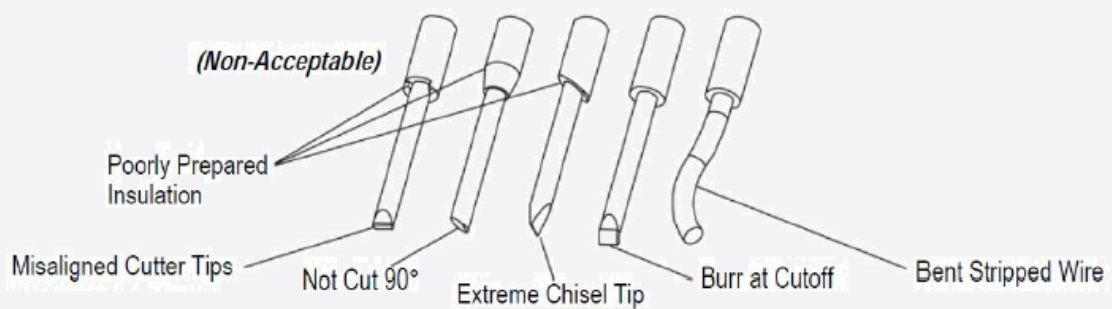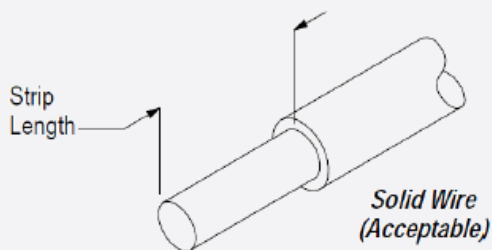

Legal and additional information.

[About Samsung Electronics Co., Ltd.](#)

Samsung Electronics Co., Ltd. is a global leader in technology, opening new possibilities for people everywhere. Through relentless innovation and discovery, we are transforming the worlds of TVs, smartphones, tablets, PCs, cameras, home appliances, printers, LTE systems, medical devices, semiconductors and LED solutions. We employ 286,000 people across 80 countries with annual sales of US\$216.7 billion. To discover more, please visit www.samsungled.com.

Copyright © 2017 Samsung Electronics Co., Ltd. All rights reserved.
Samsung is a registered trademark of Samsung Electronics Co., Ltd.
Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.
95, Samsung 2-ro
Giheung-gu
Yongin-si, Gyeonggi-do, 446-711
KOREA

www.samsungled.com

SAMSUNG