
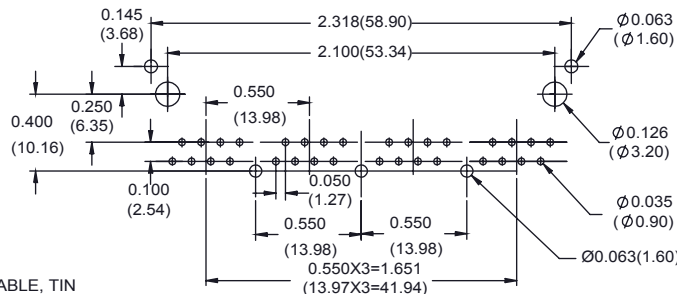


A00-432-262-450 GOLD FLASH
A00-432-362-450 15 MICROINCHES OF GOLD
A00-432-662-450 30 MICROINCHES OF GOLD
A00-432-962-450 50 MICROINCHES OF GOLD

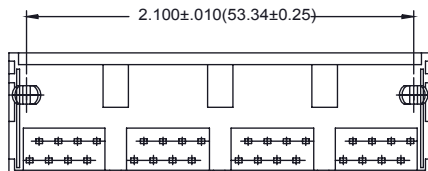

PC BOARD LAYOUT
COMPONENT SIDE SHOWN

NOTES

MATERIAL AND FINISH:

BODY: GLASS FILLED POLYESTER,
UL94V-0 RATED
CONTACTS: PHOSPHOR BRONZE(0.45mm DIA.)
SELECTIVE GOLD ON CONTACTS AS PER PART NO. TABLE, TIN
ON TERMINATION, ALL OVERNICKEL UNDERPLATE.
SHIELD: 0.25mm THICK COPPER ALLOY
PLATED WITH NICKEL

ELECTRICAL CHARACTERISTICS:

- CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- INSULATION RESISTANCE 500 MEGOHMS MIN.
- WITHSTANDING VOLTAGE : 500 VAC 1 MINUTE
- CURRENT RATING: 1.5 AMP



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR RoHS COMPLIANCY.

4 PORTS, 8 POSITIONS
SHIELDED PCB JACK (GROUND AT FRONT)

ACAD REF. DWG.: A00-432-262-450

DRAWN:F.BRIONES

DATE: SEPT.16/02

CHECKED:

DATE:

SCALE: N.T.S

SHEET 1 OF 1

DRAWING NUMBER

A00-432-262-450

ISSUE

2



EDAC INC.
TORONTO, ONTARIO
CANADA

YOUR CONNECTION TO QUALITY & SERVICE

TOLERANCE UNLESS NOTED:

.00 ± 0.01
.000 ± .006
.0000 ± .003

ARE THE PROPERTY OF EDAC INC. AND
SHALL NOT BE REPRODUCED OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.