


ANTI-VIBRATION GROMMETS



Anti-vibration grommets are designed for noise suppression in office or lab equipment. Additionally, they isolate sensitive instrumentation from unpredictable vibration and shock. The fingers of the grommets provide the flex needed to dampen unwanted noise and vibration. Specially designed shoulder screws are designed to provide the correct spacing.

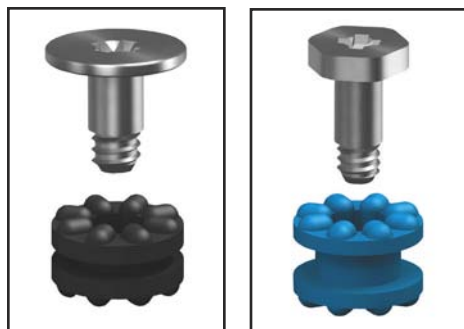

ROUND HEAD

HEX HEAD

Screw supplied unassembled with isolator


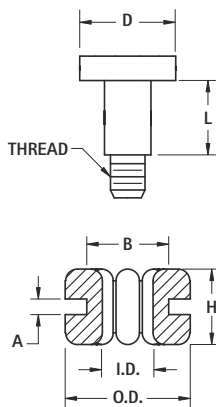


MATERIAL:
Isolator: EPDM Rubber
Shoulder Screw: Steel, Nickel Plate

| BLACK CAT. NO. | BLUE CAT. NO. | O.D. OUTSIDE DIAMETER | I.D. INSIDE DIAMETER | H HEIGHT | A PANEL THICK | B MTG. HOLE | SHOULDER SCREW | | | |
|-------------------|------------------|--------------------------|-------------------------|-------------|------------------|----------------|----------------|--------|-------------|-------|
| | | | | | | | LENGTH (L) | THREAD | D | HEAD |
| 765 | 766 | .379 (9.6) | .154 (3.9) | .228 (5.8) | .063 (1.6) | .250 (6.4) | .189 (4.8) | 6-32 | .250 (6.4) | Hex |
| 769 | 770 | .377 (9.6) | .161 (4.1) | .298 (7.6) | .125 (3.2) | .250 (6.4) | .252 (6.4) | 6-32 | .300 (7.6) | |
| 775 | 776 | .551 (14.0) | .191 (4.9) | .319 (8.1) | .063 (1.6) | .375 (9.5) | .318 (8.0) | 6-32 | .394 (10.0) | Round |
| 767 | 768 | .379 (9.6) | .154 (3.9) | .228 (5.8) | .047 (1.2) | .250 (6.4) | .197 (5.0) | M3 | .394 (10.0) | |
| 771 | 772 | .411 (11.2) | .181 (4.6) | .209 (5.3) | .031 (0.8) | .315 (8.0) | .197 (5.0) | M3 | .394 (10.0) | |
| 773 | 774 | .551 (14.0) | .191 (4.9) | .291 (7.4) | .047 (1.2) | .375 (9.5) | .252 (6.4) | M3 | .394 (10.0) | |

RUBBER GROMMETS

Ideal for electrical insulation and mechanical damping.






MATERIAL: Rubber, BUNA N

| CAT. NO. | I.D. INSIDE DIAMETER | B MTG. HOLE | A PANEL THICKNESS | O.D. OUTSIDE DIAMETER | H HEIGHT |
|----------|----------------------|--------------|-------------------|-----------------------|-------------|
| 730 | .125 (3.2) | .187 (4.7) | .062 (1.57) | .312 (7.9) | .187 (4.7) |
| 733 | .125 (3.2) | .250 (6.4) | .062 (1.57) | .343 (8.7) | .187 (4.7) |
| 734 | .125 (3.2) | .437 (11.1) | .062 (1.57) | .625 (15.9) | .187 (4.7) |
| 735 | .125 (3.2) | .375 (9.5) | .093 (2.36) | .500 (12.7) | .312 (7.9) |
| 736 | .187 (4.7) | .312 (7.9) | .062 (1.57) | .437 (11.1) | .218 (5.5) |
| 737 | .187 (4.7) | .281 (7.2) | .093 (2.36) | .437 (11.1) | .218 (5.5) |
| 738 | .250 (6.4) | .437 (11.1) | .062 (1.57) | .625 (15.9) | .187 (4.7) |
| 739 | .250 (6.4) | .375 (9.5) | .062 (1.57) | .562 (14.3) | .250 (6.4) |
| 740 | .250 (6.4) | .375 (9.5) | .093 (2.36) | .500 (12.7) | .250 (6.4) |
| 741 | .312 (7.9) | .562 (14.3) | .062 (1.57) | .812 (20.6) | .312 (7.9) |
| 742 | .312 (7.9) | .437 (11.1) | .062 (1.57) | .625 (15.9) | .281 (7.1) |
| 743 | .312 (7.9) | .437 (11.1) | .093 (2.36) | .625 (15.9) | .312 (7.9) |
| 744 | .375 (9.5) | .625 (15.9) | .062 (1.57) | .875 (22.2) | .312 (7.9) |
| 745 | .375 (9.5) | .500 (12.7) | .062 (1.57) | .625 (15.9) | .250 (6.4) |
| 732 | .437 (11.1) | .562 (14.3) | .062 (1.57) | .750 (19.1) | .250 (6.4) |
| 746 | .437 (11.1) | .687 (17.4) | .062 (1.57) | .937 (23.8) | .312 (7.9) |
| 747 | .500 (12.7) | .812 (20.6) | .062 (1.57) | 1.062 (27.0) | .312 (7.9) |
| 748 | .500 (12.7) | 1.250 (31.8) | .062 (1.57) | 1.500 (38.1) | .250 (6.4) |
| 749 | .500 (12.7) | .750 (19.1) | .093 (2.36) | .968 (24.6) | .281 (7.1) |
| 750 | .562 (14.3) | .812 (20.6) | .062 (1.57) | 1.062 (27.0) | .312 (7.9) |
| 752 | .625 (15.9) | .875 (22.2) | .062 (1.57) | 1.125 (28.6) | .312 (7.9) |
| 753 | .625 (15.9) | 1.250 (31.8) | .062 (1.57) | 1.500 (38.1) | .250 (6.4) |
| 755 | .750 (19.1) | 1.062 (27.0) | .062 (1.57) | 1.375 (34.9) | .375 (9.5) |
| 756 | .750 (19.1) | 1.437 (36.5) | .062 (1.57) | 1.812 (46.0) | .375 (9.5) |
| 757 | .875 (22.2) | 1.250 (31.8) | .062 (1.57) | 1.625 (41.3) | .437 (11.1) |

FLEXIBLE GROMMETING

Ideal for maintenance, short-run production, R&D or prototyping. Supplied in 25 ft. rolls. Make your own grommets to fit any size or shape required.

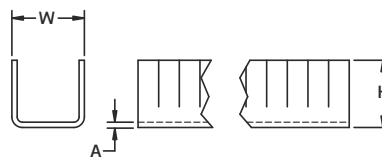



MATERIAL: Nylon 6/6, Black

| CAT. NO. | MAX PANEL | W WIDTH | H HEIGHT | A THICK |
|----------|-------------|------------|------------|-------------|
| 8615 | .052 (1.32) | .139 (3.5) | .190 (4.8) | .028 (0.7) |
| 8616 | .085 (2.16) | .182 (4.6) | .200 (5.1) | .040 (1.02) |
| 8617 | .125 (3.18) | .232 (5.9) | .220 (5.6) | .040 (1.02) |

"UNIVERSAL" RUBBER GROMMET

- Designed to adjust to different cable diameters from .125 (3.2) to .312 (7.9).
- Self-adjusting membrane forms a dust resistant seal.



MATERIAL: Thermoplastic Rubber, Black

| CAT. NO. | O.D. OUTSIDE | I.D. INSIDE DIA. | A DIA. HOLE | B MTG HOLE | H HEIGHT |
|----------|--------------|------------------|-------------|--------------|------------|
| 777 | .650 (16.32) | .380 (9.7) | .090 (2.3) | .500 (12.7) | .250 (6.4) |
| 778 | 1.25 (31.8) | .810 (20.6) | .160 (4.0) | 1.000 (25.4) | .370 (9.4) |