


NOTES:

1.0 ELECTRICAL SPECIFICATIONS

- 1.1 FREQUENCY RANGE: DC to 4.0 GHz
- 1.2 VSWR: DC - 2 GHz 1.15:1 MAX.
2 GHz - 4 GHz 1.25:1 MAX.
- 1.3 MAXIMUM INPUT POWER:
0.5 WATTS AVG. AT +25°C DERATED
- 1.4 OPERATING TEMPERATURE RANGE:
-65°C to +125°C
- 1.5 IMPEDANCE: 50 OHMS

2.0 MARKING: MARK UNIT AS SHOWN.
(REF.: INK-02639-27-85)

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

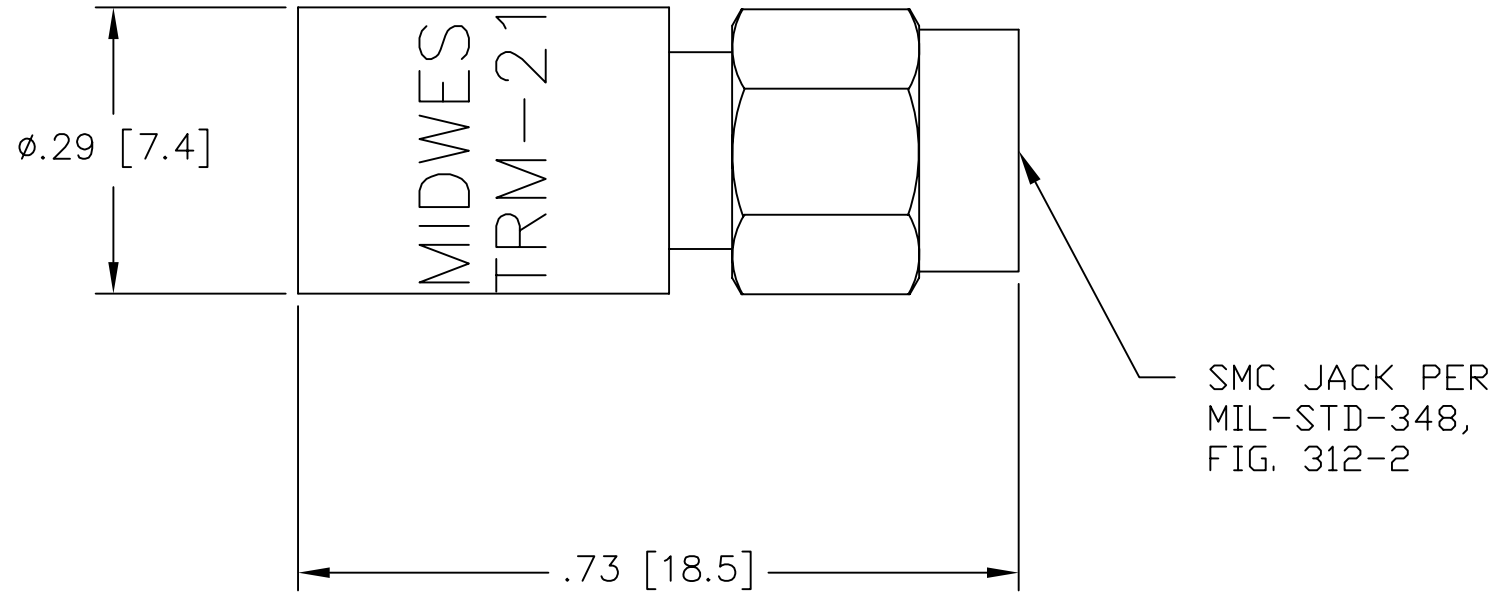

MODEL NUMBER	TRM-2199-FO-SMC-02
REV.	-

REV.	-	DESCRIPTION	RELEASED	DATE	4/15/03
------	---	-------------	----------	------	---------

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	FSCM NO. 34078		MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION SMC JACK	
	DRAWN/DATE S.ORLOV 4/15/03	ENG./DATE G.KOZAK 4/15/03	DRAWING NUMBER TRM-2199-FO-SMC-02	
	CHECKED/DATE	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1