	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

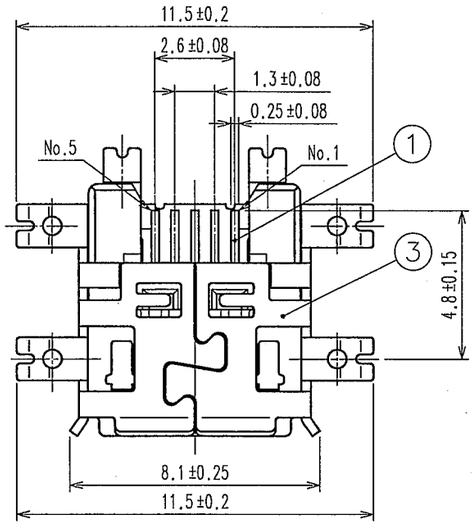

RECOMMENDED PATTERN

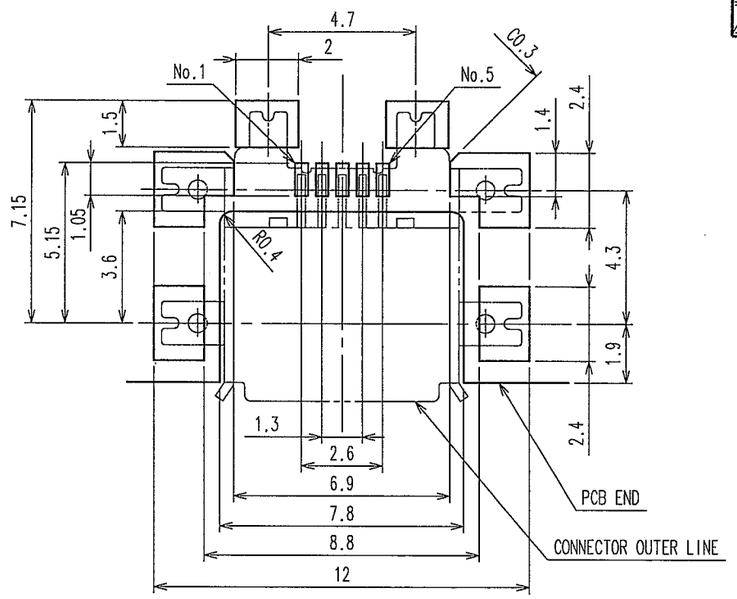

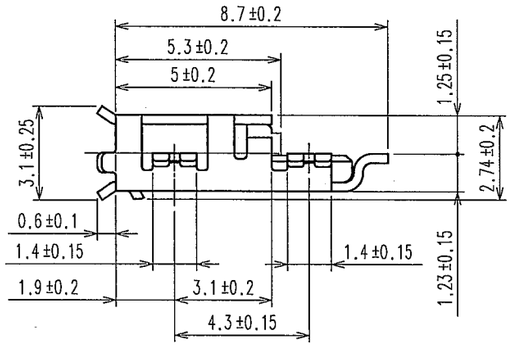

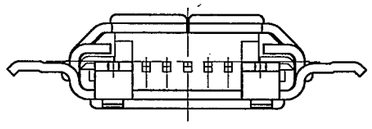

4 DRAWING FOR PACKING(FREE)

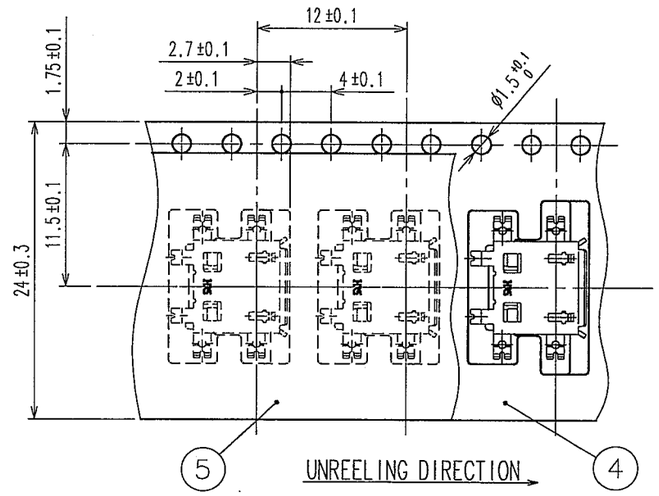

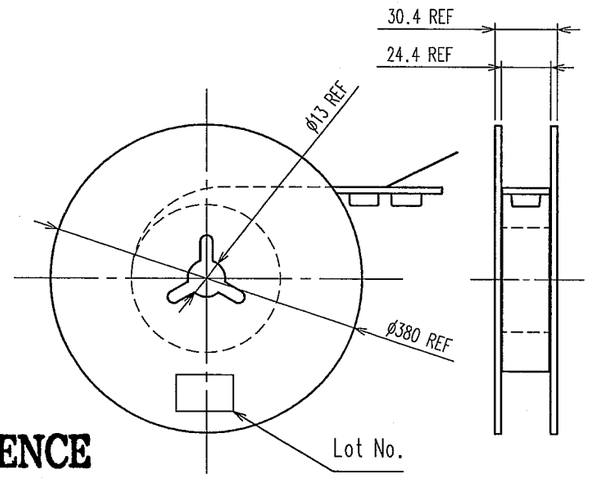

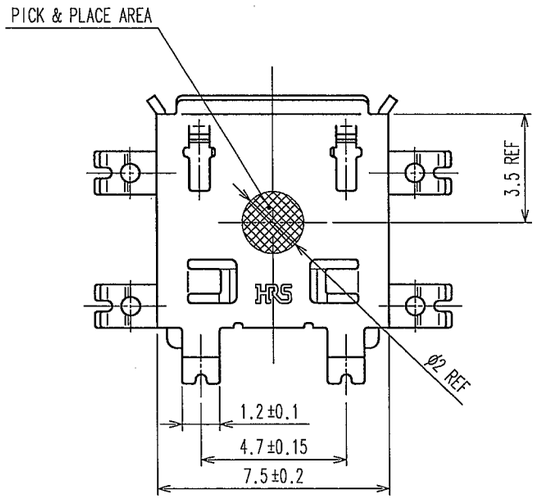

NOTES 1 INTERFACE DIMENSIONS CONFORMS TO MICRO-B RECEPTACLE OF USB STANDARDS.
2 CO-PLANARITY TO BE 0.08 MAX.
3 PLATING
CONTACT AREA : GOLD 0.75μm MIN.
LEAD AREA : GOLD 0.03μm MIN.
UNDER PLATING: NICKEL 2μm MIN.
4 PER REEL : 2000 pcs

DRAWING FOR REFERENCE
This is subject to change without notice

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
2	LCP	COLOR BLACK UL94V-0	5	PS	
1	COPPER ALLOY	3	4	PS	
			3	STAINLESS STEEL	TIN PLATING 0.5μm min, LUBRICANT

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	R. Koyama 06.12.27	R. Koyama 06.12.27	H. Kobayashi 06.12.27	[signature] 06.12.27	ENG 06.12.27 DEPT

SCALE 5 : 1	DRAWING NO. EDC3-126186	PART NO. ZX62M-B-5P
UNITS mm	HRS HIROSE ELECTRIC CO., LTD	CODE NO. CL242-0024-7 1/1

TO

FORM NO.22